



ONDULINE EASYLINE®

LEISURE HOUSING

Made by me!



GARDEN SHED

ONDULINE EASYLINE®

Made by me!



Before



After

ONDULINE EASYLINE®




TOOL SHELTER




PLAYGROUND

8303205A - 02/2018 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.

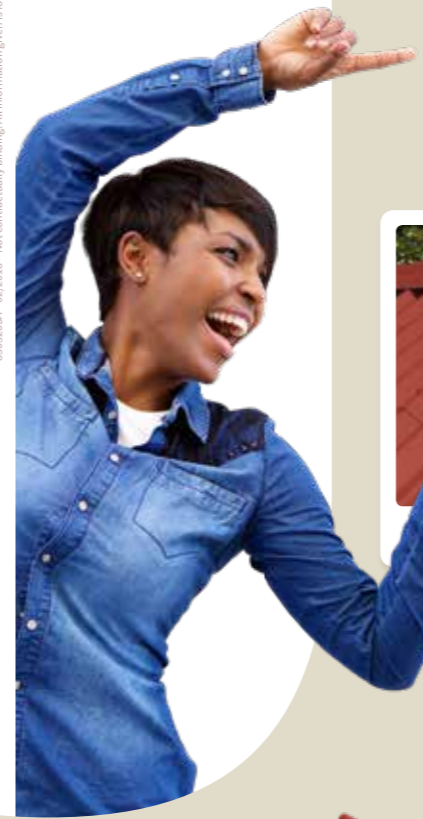

**EASY TO CARRY,
EASY TO HANDLE,
EASY TO INSTALL.**

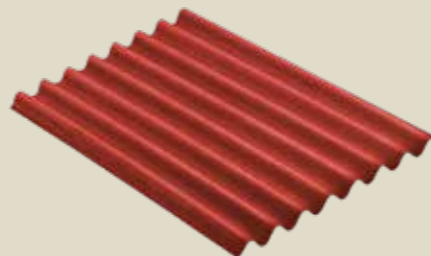

More than 50% of our material made with recycled content



Fully compliant with regulations

Sustainable product & production because we care about environment!

ONDULINE EASYLINE® is a flexible and handy material, suitable to ensure an easy and longlasting solution for your roof.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!



Easy to install



Onduline® Sealsmart™



Watertight



Lightweight



Eco-responsible

Made by me!

ONDULINE SA
35 rue Baudin - CS20055
F-92593 Levallois-Perret
onduline.com



Onduline French limited liability company with board of directors, share capital of €11,323,485.05
RCS Nanterre 552 088 361

Onduline®
Lightweight roofing systems

Onduline®
Lightweight roofing systems

ONDULINE EASYLINE®

The small roofing sheets; perfectly adopted to all canopy roofs. A child's play to transport, handle and install!

A large choice of colors



Intense Red



Intense Brown




Intense Green



Intense Black


Technical characteristics

Length	100 cm
Width	76 cm
Thickness	2,6 mm
Corrugation height	38 mm
Weight per sheet	2,5 kg
Surface	0,76 m ²
Carbon footprint	4 kg eq CO2/m ²

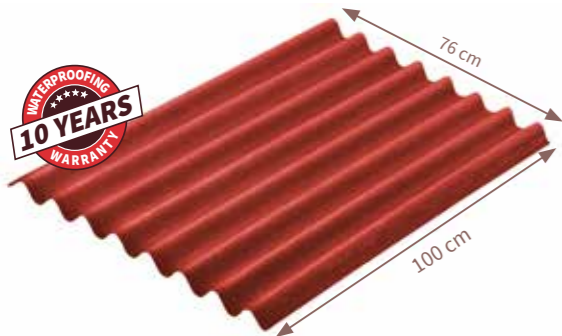


Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).


Installation in few and easy steps

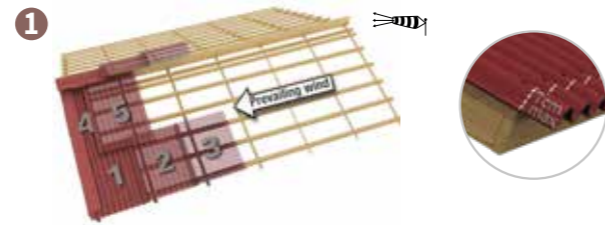

Laying in staggered rows avoids the superposition of 4 sheet thicknesses at overlap points. Always start your first row below the gutter, leaving maximum 7 cm overhang. Begin the second row with half an ONDULINE EASYLINE® sheet (cut lengthwise) and carry on with complete sheets.

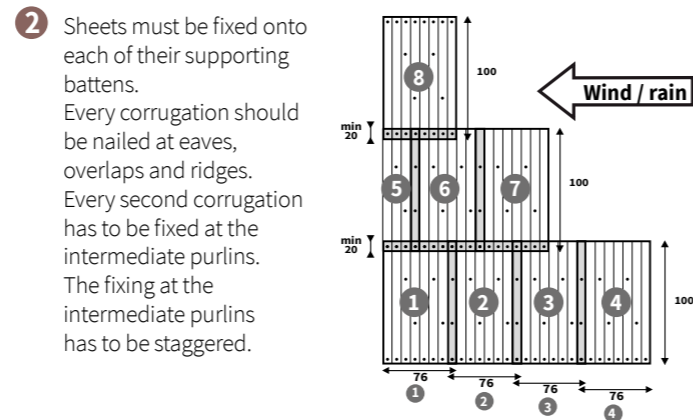

The ridge element has to overlap the ONDULINE EASYLINE® sheet min 12 cm.



The ridge elements are fixed in opposite direction to the prevailing winds.

Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

4 Roof support

Battens rules. The roof pitch and occasional load (especially wind and snow) determine the distance between the battens. **The maximum distance is in any case 43 cm.**

Roof pitches

>9 %

>27 %

Maximum battens distance



Boarding only (Recommended)



26,7 cm

Minimum end overlap



30 cm



20 cm

Minimum side overlap



2 corrugations



1 corrugation


Effective sheet coverage

0,47 m²

0,53 m²

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$



Minimum pitch required: 9%



Watch the video!

Accessories



ONDULINE® D100 RIDGE
Dimensions: 100 x 12 x 7 cm



ONDULINE® A100 VERGE
Dimensions: 100 x 50 cm



Circular nails
Length: 65 mm



Universal screws
Length: 60 mm

Minimum 15 fasteners/m²

Made by me!

How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.

