

CORRUGATED BITUMEN TILE


TECHNICAL DATA SHEET

Date: 20170109
Reference: T08029 - V05

ONDUVILLA® DRP

Product characteristics

Length	L	107 cm
Width	w	40 cm
Thickness	t	3 mm
Heigh of corrugation	H	38 mm
Pitch of module	S	195 mm
Gross surface		0,43 m ²
Weight of product		1,4 kg
Weight per gross surface		3,2 kg/m ²
Corrugations + Flats		6 + 5

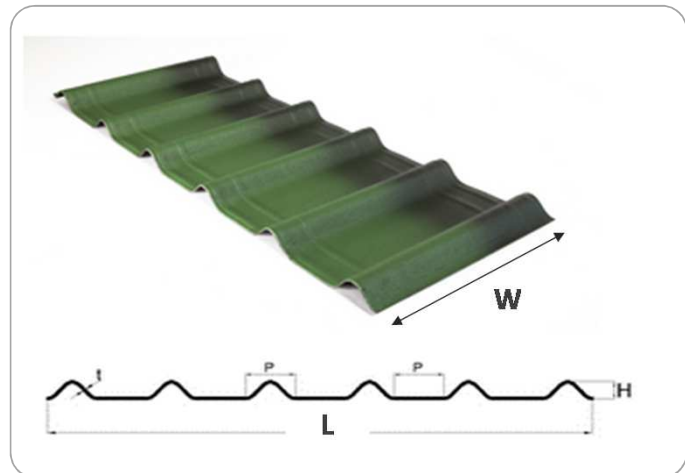

General information

► Application field

Lightweight bitumen tile for roofing.

► Material description

Bitumen tile reinforced with cellulosic fibers and thermosetting resin and protected from the weather by a specific water-based paint film.

► Color range

Slate grey Classic red 3D
Fiorentino 3D

► Installation

Special conditions of installation are required. Refer to the installation guide.

► Tariff custom code

HS: 68079000

► CE marking

ETA 10/0018 - Corrugated bitumen tiles

DOP: 08-001 2015-09-15



Technical data

► Mechanical & physical properties

Bending under downward load	Not Applicable
Impact strength	Not Applicable
Tearing strength	> 200 N
Water impermeability	Pass ¹
Proportion of bitumen	> 40%
Homogeneity	Pass ²
Water absorption	< 20%
Water vapor permeability - EN ISO 12572	Not applicable

¹No drop of water underneath sheet after 48 hours

²No area larger than 1 cm² without bitumen

► Durability

Water impermeability after ageing	Pass ¹
Tearing strength after ageing	> 200 N

► Fire performance

Reaction to fire - EN 13501-1	E
External fire performance - EN 13501-5	Froof