


Color



Dual Red

Technical characteristics

Length	195 cm
Width	82 cm
Corrugation height	38 mm
Weight per m ²	2,8 kg
Weight per sheet	4,5 kg
Surface	1,60 m ²
Net coverage surface	1,32 m ²

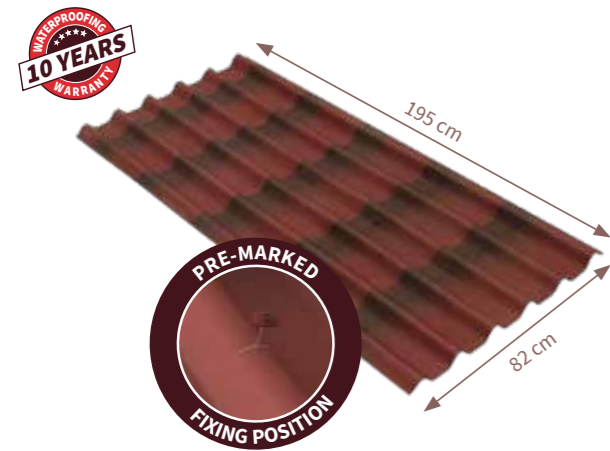

Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).

Installation in few and easy steps

- 1** Full deck Discontinuous support

 - Installation could be realized either on full deck like on OSB panels (recommended) or on discontinuous support **with purlins every 36,6 cm, center to center.**
 - Start laying sheets over the gutter with 6 cm overhang.
- 2**

 - Lay sheets in the opposite direction to the prevailing winds.
 - “UP ↑” signs indicate the direction of the ridge.
 - Stagger the rows, by starting the second row with a half sheet (see ½ sheet #4).
 - Ensure waterproofing by aligning the overlapping lines (overlap 12 cm).
- 3** Full deck Discontinuous support

 - 15 fixings minimum should be used per sheet. The fixing, always set in the top of corrugations on the grey marks, should be done in the right order. Wait to fix the last corrugation until you overlap it with the verge element or the next sheet.

- 4**

 - The aesthetics and wind uplift protection can be optimized by using the verge element accessory, which is fixed first on the sidewall, then as well on the top of the corrugation. Plan 6 fixings per elements.
- 5**

 - Cover the ridge and fix it on each side of the roof, on top of each corrugation. The direction of the overlap is opposite to the direction of the prevailing winds.
- 6**

ONDULINE EASYSTYLE® lightweight roofing system provides an attractive tile look to a wide variety of garden buildings.

Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

CALCULATE THE PITCH OF YOUR ROOF

Pitch (%) = $\frac{h}{b} \times 100$

Minimum pitch required: 15 %

Accessories



Minimum 10 fasteners/m²

Made by me!

How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.

