





ONDULINE® CLASSIC

The original Onduline® Roofing and Overroofing system

- Extra resistance to hot and humid climates in its DR version
- Can be colored underneath for more aesthetical ceiling (DRC & DRCP versions)
- Available in Pigmented, Intense and Painted colors

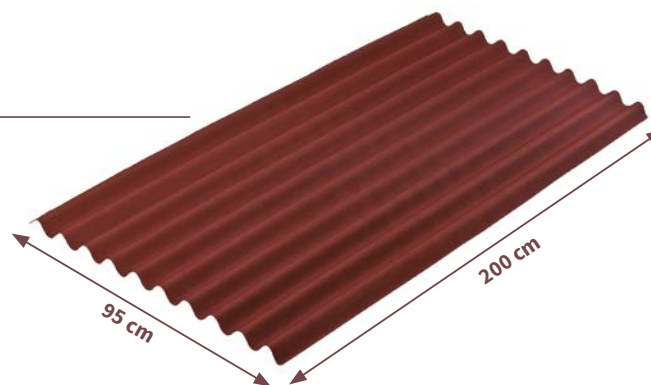

Technical characteristics



Profile (number of corrugations)	10								
Length (cm)	200								
Width (cm) (w)	95								
Gross Surface (sqm)	1,9								
Thickness (mm) (t)	3								
Color	PIGMENTED			INTENSE			PAINTED		
Type	SR	DR	DRC	DRV	DRCV	SRP	DRP	DRCP	
Weight (kg)	6,4	6,5		6,6		6,5	6,8		
Weight/sqm (Kg)	3,4			3,5		3,4	3,6		
Corrugation Pitch (mm) (P)	95								
Height wave (mm) (H)	38								
Overhang at eaves (cm)	7								
Net Surface (sqm)									
Roof pitch 9% to 17% (5° - 10°)	1,29								
Roof pitch 17% to 27% (10° - 15°)	1,54								
Roof pitch > 27 % (>15°)	1,56								

