


ONDUVILLA ROOF TILES



Lightweight

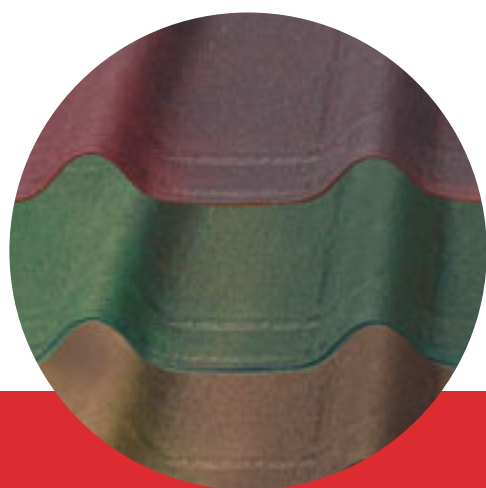

Eco-responsible



Easy
to install

**STYLISH BITUMINOUS
CORRUGATED ROOF TILES
TO REPLICATE CLAY TILES**

www.onduline.co.uk

Onduline®
Lightweight roofing systems

ONDUVILLA TILES



ONDUVILLA® TILES

Bituminous corrugated roof tiles



Technical characteristics



	ONDUVILLA
Length	107 cm
Width	40 cm
Corrugation height	38 mm
Weight per tile	1,27 kg
Weight per m ²	4 kg
Gross coverage per tile	1.43 m ²
Net coverage per tile	1.31 m ²
Tiles per m ²	3.23 pcs

Accessories

For complete waterproofing for 15-years, ONDUVILLA tiles can be fitted with a range of complementary accessories and fixings:



For maximum ventilation, **ONDUTISS** membranes are the recommended air permeable membrane to use with ONDUVILLA for all timber build structures.




ONDULINE UNIVERSAL SCREW

A number of fixings are available to colour match the full range of **ONDUVILLA** tiles:


- Universal screws
- Safe top nail
- PE Nails

See the full range of accessories at www.onduline.co.uk

Colour range




Black



Shaded Red



Classic Red



Shaded Brown



Shaded Green

Onduline Building Products Ltd

Dawson House

Jewry Street

London | EC3N 2EX

enquiries@onduline.net

+44 (0)207 727 0533