


**ONDUPLAST
COLOUR®**



Made by me!

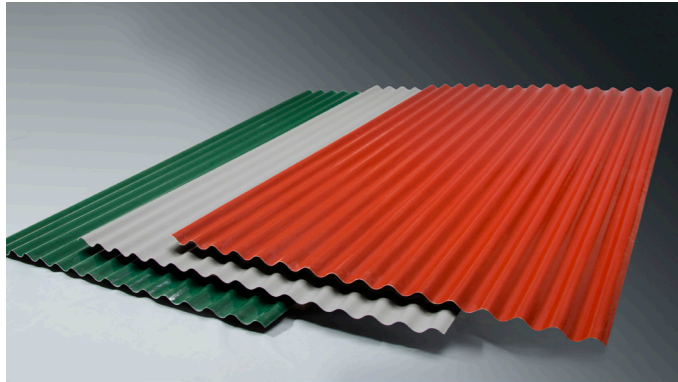

Norm EN 534
Fully compliant with regulations

ONDULINE BUILDING PRODUCTS LTD
Dawson House, 5 Jewry Street
London, EC3N 2EX
onduline.co.uk



Onduline French joint stock company
share capital of €11,323,485.05
RCS Nanterre 552 088 361

Onduline®
Lightweight roofing systems




**ONDUPLAST
COLOUR®**

Made by me!



**VERSATILE, OPAQUE
POLYESTER SHEETS.
SO EASY TO INSTALL.**

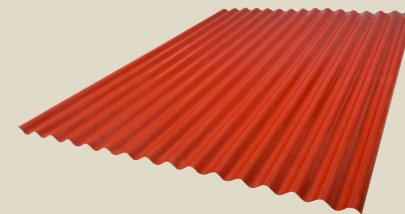

Onduline®
Lightweight roofing systems

**ONDUPLAST
COLOUR®**



Garden shed



Carport



Easy to install



Watertight

Aesthetic

Lightweight



Onduline®
Sealsmart™



Eco-responsible

ONDUPLAST COLOUR®

ONDUPLAST COLOUR® is a colourful fibreglass sheet with a special polyester film for **enhanced protection**. An **easy to install** tough sheet with erosion and chemical resistance making it ideal for all types of garden buildings as well agricultural projects.

Made by me!

Color



Light grey

Green

Brick red

Technical Characteristics

	ONDUPLAST COLOUR
Length	200 cm
Width	90 cm
Corrugation height	18 mm
Corrugation width	76 mm
Thickness	0.7 mm
Colours	Light Grey, Brick Red, Green
Light transmission	0% totally opaque sheet
Superficial protection	External surface protected with a special isophthalic resin (Gelcoat), bonded to the GRP surface during hot lamination – particularly stable against atmospheric agents and shock resistance retains its structural and functional integrity over time avoiding superficial abrasion/erosion.

Onduline 10 years guarantee for weatherproofing, valid if the product has been installed with Onduline recommended accessories and in full compliance with installation recommendations.

Installation steps

1



Use an angle grinder to cut the sheets to size.

2



Start installing the sheets from the bottom, from the left or right and in opposite direction to the pre-vailling winds.

3



The first row of sheets must over hang **10 cm** from the supporting structure.

4



Use ONDULINE UNIVERSAL SCREWS to fix the sheets. Firstly drill holes in the sheet at the top part of the corrugation, placing the fixing screws on every second corrugation. *The diameter of the hole must be 3 mm larger than the diameter of the screw, to allow for any structural movement.*

5



Insert the ONDULINE UNIVERSAL SCREW, which has an integrated smart seal washer to provide a watertight seal.

6



Overlap the sides by two corrugations.

7



Continue with the laying of the sheets by drilling the holes and applying the fixing screws, until the first row is completed.

8



If installing a second row, ensure that you start at the same end of the first row: the sheet that is installed must overlap the previous row. The end overlap of the two rows should be 20cm.

Accessories

UNIVERSAL SCREWS

ONDUPLAST COLOUR® can be securely fixed with ONDULINE UNIVERSAL SCREWS that are available in matching colours to the ONDUPLAST COLOUR® sheets.



UNIVERSAL SCREWS

Length: 60mm

Minimum 15 fixings per sheet



Made by me!

How to cut and trim your product?

You can easily cut the sheets with an angle grinder.

