


ONDULINE® RIDGE A100

Product characteristics

Length	L	100 cm
Overall width	w	42 cm
Height of corrugations	H	3 cm
Thickness	t	3 mm
Surface		0,42 m ²
Weight		1,33 kg
Weight per m ²		3,2 kg/m ²

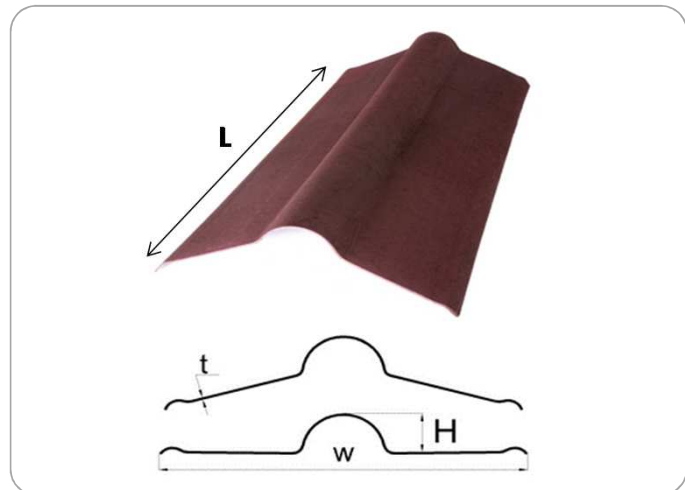

General information

► Application field

Lightweight bitumen accessory designed for all buildings covered with ONDULINE® roofing system to provide a weatherproof seal at the ridge.

► Material description

Bitumen material reinforced with cellulosic fibers and thermosetting resin. The composite is colored with inorganic pigments.

► Color range:

Black	Red	Brown
Green	Anthracite black	Autumn red
Cedar green		

► Installation

Special conditions of installation are required. Refer to the installation guide.

► Tariff custom code

HS: 68079000

Technical data

► Mechanical & physical properties

Tearing strength	≥ 200 N
Water impermeability	Pass ¹
Proportion of bitumen	> 40%
Homogeneity	Pass ²
Water absorption	< 20%

¹No drop of water underneath sheet after 48 hours

²No area larger than 1 cm² without bitumen

► Durability

Water impermeability after ageing	Pass ¹
Tearing strength after ageing	≥ 200 N
Thermal coefficient	< 100.10-6 1/K

► Fire performance

Reaction to fire - EN 13501-1	E
-------------------------------	---