



ONDULINE EASYLINE®

LEISURE HOUSING

Made by me!



GARDEN SHED

ONDULINE EASYLINE®

Made by me!



Before



After

ONDULINE EASYLINE®



TOOL SHELTER




PLAYGROUND

8303205A - 04/2022 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.



**EASY TO CARRY,
EASY TO HANDLE,
EASY TO INSTALL.**

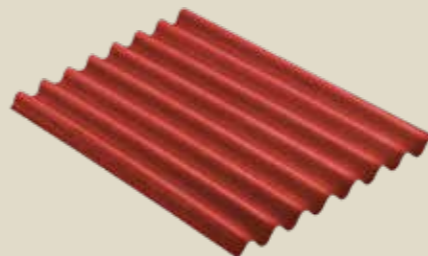

Onduline®
Lightweight roofing systems

More than 50% of our material made with recycled content



Fully compliant with regulations

Sustainable product & production because we care about environment!

An Ondura Group Company



Onduline®

ONDULINE
24 Quai Gallieni
F-92150 Suresnes
onduline.com



Onduline French joint stock company
share capital of €11,323,485.05
RCS Nanterre 552 088 361

Made by me!



Easy to install



Onduline® Sealsmart™



Watertight



Lightweight




Eco-responsible

ONDULINE EASYLINE®

The small roofing sheets; perfectly adopted to all canopy roofs. A child's play to transport, handle and install!

ONDULINE EASYLINE®

A large choice of colors

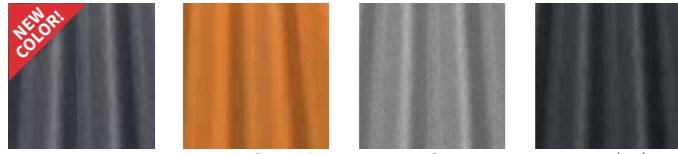


Intense Anthracite Grey Intense Ceramic Intense Grey Intense Black



Intense Green Intense Brown Intense Red


Technical characteristics

Length	100 cm
Width	76 cm
Thickness	2,6 mm
Corrugation height	38 mm
Weight per sheet	2,5 kg
Surface	0,76 m ²
Carbon footprint	4 kg eq CO ₂ /m ²

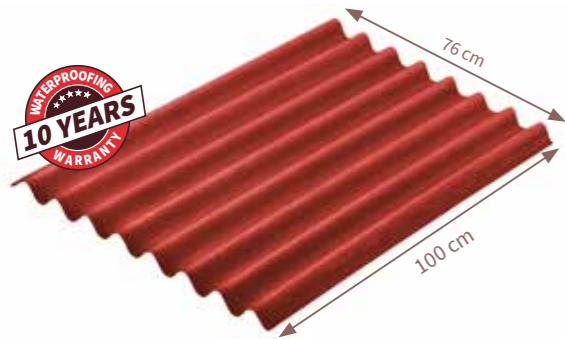



Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).

Installation in few and easy steps

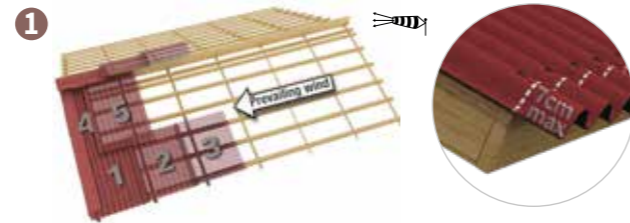

Laying in staggered rows avoids the superposition of 4 sheet thicknesses at overlap points. Always start your first row at the gutter, leaving maximum 7 cm overhang. Begin the second row with half an ONDULINE EASYLINE® sheet (cut lengthwise) and carry on with complete sheets.

2 Sheets must be fixed onto each of their supporting battens. Every corrugation should be nailed at eaves, overlaps and ridges. Every second corrugation has to be fixed at the intermediate purlins. The fixing at the intermediate purlins has to be staggered.

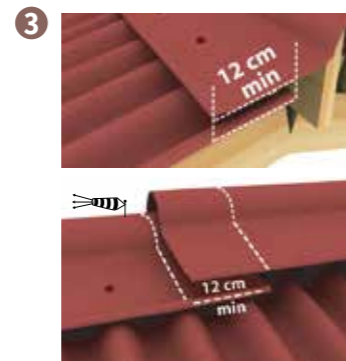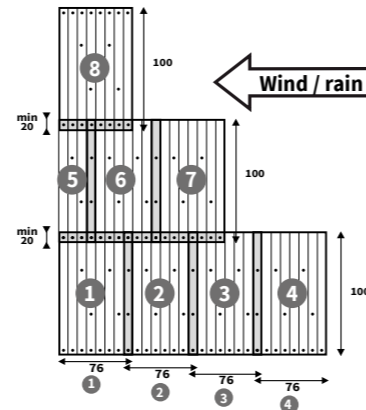

The ridge element has to overlap the ONDULINE EASYLINE® sheet min 12 cm.

The ridge elements are fixed in opposite direction to the prevailing winds.

Maintain regularly your roof for a better durability: remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

4 Roof support

Battens rules. The roof pitch and occasional load (especially wind and snow) determine the distance between the battens. **The maximum distance is in any case 43 cm.**

Roof pitches

>9 %

>27 %

Maximum battens distance



Boarding only (Recommended)

43 cm

Minimum end overlap



30 cm

15 cm

Minimum side overlap



2 corrugations

1 corrugation


Effective sheet coverage

0,47 m²

0,57 m²

CALCULATE THE PITCH OF YOUR ROOF

$$\text{Pitch (\%)} = \frac{h}{b} \times 100$$



Minimum pitch required: 9%



Watch the video!

Accessories



ONDULINE® D100 RIDGE
Dimensions: 100 x 12 x 7 cm



ONDULINE® A100 VERGE
Dimensions: 100 x 50 cm



Circular nails
Length: 65 mm



Universal screws
Length: 60 mm

Minimum 15 fasteners/m²

Made by me!

How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.



Think Safety wear PPE