



**ONDULINE
EASYFIX®**

PATIO



GARDEN SHED

The **ONDULINE EASYFIX®** sheets are light, easy to install and can be used on the garden annexes, carport, small wooden buildings, gazebos etc.

Onduline® material does not contain any asbestos, and never had. Onduline® material does not contain any metal, it will never rust!

Made by me!

Made by me!



CE
Norm EN 534



More than 50% of our material made with recycled content

Fully compliant with regulations

Sustainable product & production because we care about environment!

ONDULINE BUILDING PRODUCTS LTD
150 Minories | Aldgate
London | EC3N 1LS
onduline.co.uk



Onduline French joint stock company
share capital of €11,323,485.05
RCS Nanterre 552 088 361

Onduline®
Lightweight roofing systems

8306105A - 12/2018 - Not contractually binding. All information given is for illustrative purposes only and may be modified without notice.



**ONDULINE
EASYFIX®**

Made by me!




Before



After

**INTUITIVE
COVERING SHEET:
EASY & FUN TO FIX.**

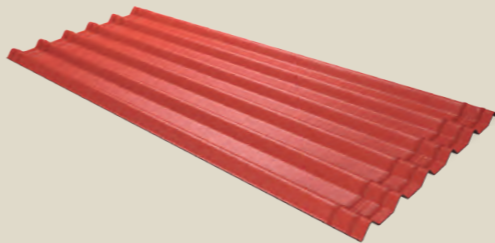

Onduline®
Lightweight roofing systems

**ONDULINE
EASYFIX®**



GARDEN SHED



GARAGE



Easy to install



Watertight



Lightweight



Intuitive
installation



Eco-responsible



Onduline®
Sealsmart™

ONDULINE EASYFIX®

ONDULINE® EASYFIX corrugated bitumen roof sheets are made from the same **quality material** as all Onduline® sheets. The profile of EASYFIX is a combination of flat and corrugations for a more **modern look** as well as for **ease of installation**.

A large choice of colors




Intense Anthracite Grey Black Green Red



Brown


Technical characteristics

Length	200 cm
Width	82 cm
Corrugation height	38 mm
Weight per m²	2,77 kg
Weight per sheet	4,5 kg
Surface	1,64 m²
Net coverage surface	1,34 m²

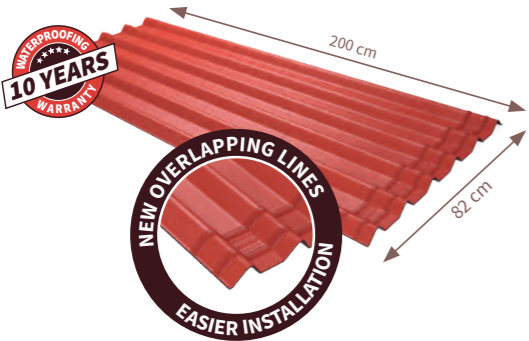


Onduline 10 years warranty for waterproofing, valid if the product has been installed with Onduline recommended accessories (Ridge, Verge, Fasteners) and in full compliance with installation recommendations (more on onduline.com).


Installation in few and easy steps

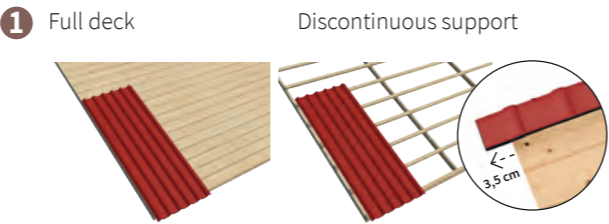

Start laying sheets over the gutter with 3,5 cm overhang maximum. Installation could be realized either on full deck (recommended) or on discontinuous support (**every 37 cm**).

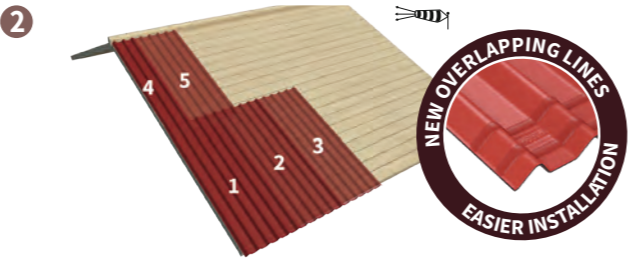


Lay sheets in the opposite direction to the prevailing winds. Stagger the rows, by starting the second row with a half sheet. Ensure easily the waterproofing by aligning the two overlapping lines.

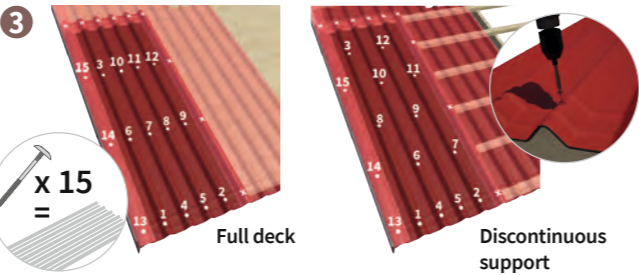


15 fixings minimum should be used per sheet. The fixing, always set in the top of corrugations, should be done in the right order and in between the two overlapping lines. Wait to fix the last corrugation until you overlap it with the verge element or the next sheet.


Maintain regularly your roof for a better durability:
remove vegetation and leaf debris, take care of evacuations, accessories and structure, and maintain continuous ventilation.

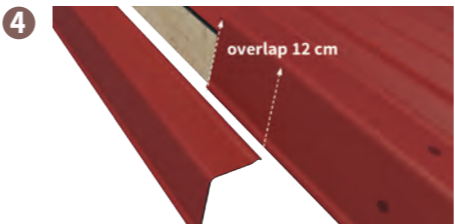

The aesthetics and wind uplift protection can be optimized by using the verge element accessory, which is fixed first on the sidewall, then as well on the top of the corrugation.

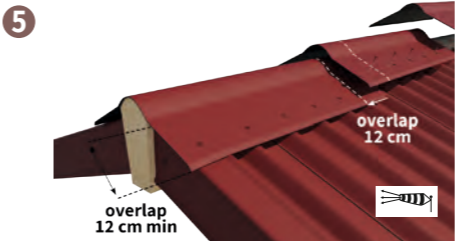


Cover the ridge with the standard ridge and fix it on each side of the roof, on top of each corrugation. The direction of the overlap is opposite to the direction of the prevailing winds.

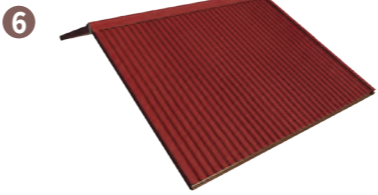

ONDULINE EASYFIX® sheets provide an attractive, colored and long lasting finishing to a wide variety of garden buildings.

CALCULATE THE PITCH OF YOUR ROOF

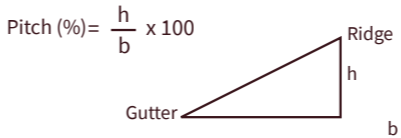


Minimum pitch required: 9% (5 degrees)



Watch the video!

Accessories

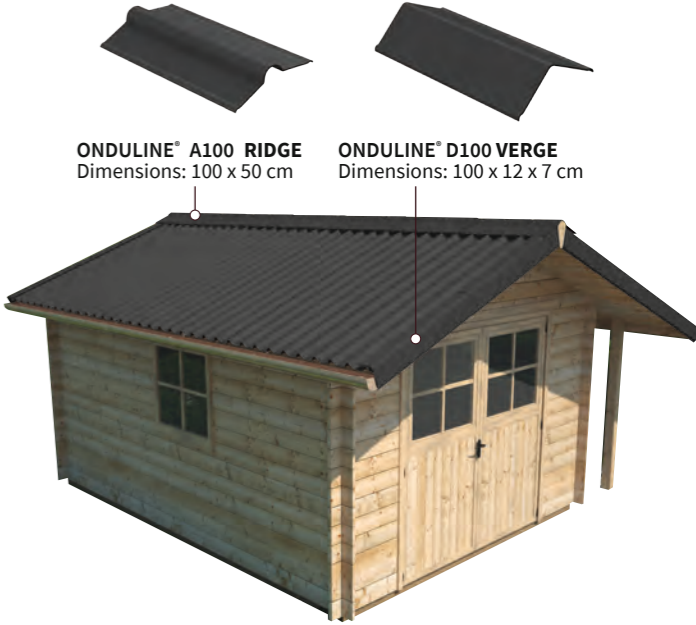

Circular nails
Length: 65 mm

Universal screws
Length: 60 mm

Minimum 10 fasteners/m²

Made by me!



How to cut and trim your product?

You can easily cut the sheets with roofers cutter, or with hand or mechanical saw.

