


# ONDULINE® VERGE-RIDGE B100 INTENSE

## Product characteristics

Length	L	100 cm
Width at 0°	w	40,5 cm
Flat width	Fw	3,0 mm
Height of accessory	H	NA
Thickness	t	3,0 mm
Surface		0,41 m <sup>2</sup>
Weight		1,1 kg
Weight per m <sup>2</sup>		2,7 kg/m <sup>2</sup>

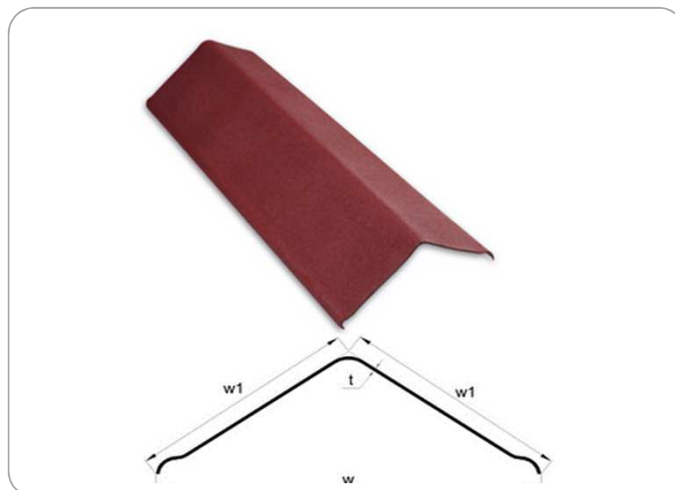

## General information

### ► Application field

Lightweight bitumen accessory designed for all buildings covered with ONDULINE® roofing system to provide a weatherproof seal at the ridge and at the verge.

### ► Material description

Bitumen material reinforced with cellulosic fibers and thermosetting resin and protected against weathering by a specific water-base varnish film.

### ► Color range:

Intense red  
Intense brown                      Intense black  
Intense green

### ► Installation

Special conditions of installation are required. Refer to the installation guide.

### ► Tariff custom code

HS: 68079000

## Technical data

### ► Mechanical & physical properties

Tearing strength	≥ 200 N
Water impermeability	Pass <sup>1</sup>
Proportion of bitumen	> 40%
Homogeneity	Pass <sup>2</sup>
Water absorption	< 20%

<sup>1</sup>No drop of water underneath sheet after 48 hours

<sup>2</sup>No area larger than 1 cm<sup>2</sup> without bitumen

### ► Durability

Water impermeability after ageing	Pass <sup>1</sup>
Tearing strength after ageing	≥ 200 N
Thermal coefficient	< 100.10-6 1/K

### ► Fire performance

Reaction to fire - EN 13501-1	E
-------------------------------	---